
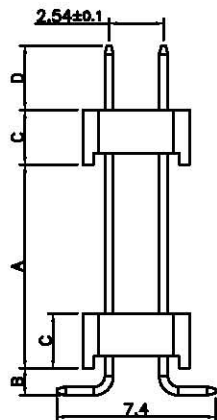


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/09/08'		

N=NO. OF CONTACTS/2

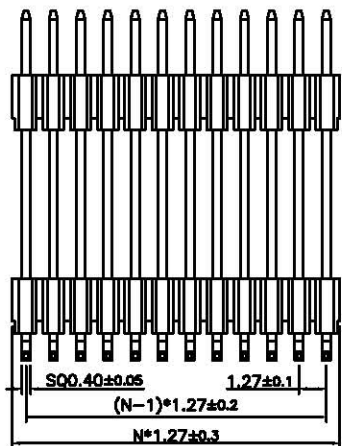

TYPE	DIM A	DIM B	DIM D
1	9.46	1.27	3.00
2			
3			
4			
5			





NOTES:

- MATERIAL
 - INSULATOR: HIGH TEMPERATURE MATERIALS(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MQ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-12

4. PRODUCT NUMBER CODE:

DS1031-12 - X X X X X X

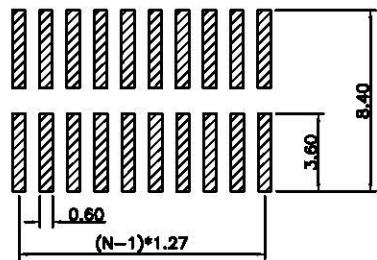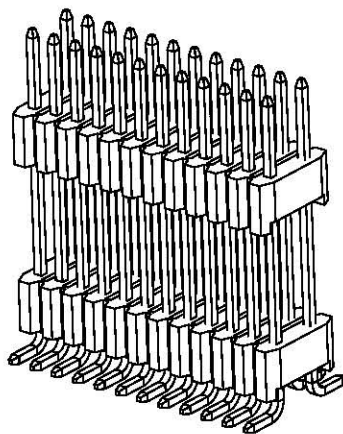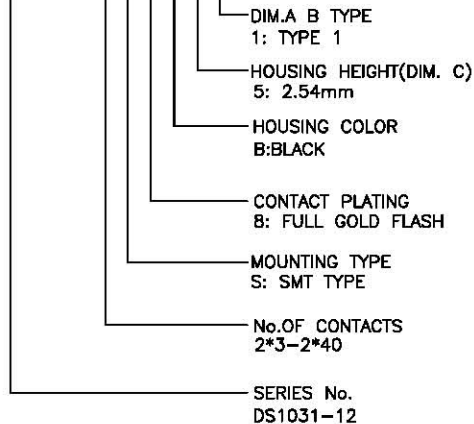

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	1.27*2.54mm PIN HEADER
.X	±0.38	.X	±3°		SMT TYPE STACK SERIES
.XX	±0.25	.XX	±2°		SERIES DS1031-12 SERIES
DRAWING TYPE		CUSTOMER			
SCALE		1:1	SHEET		1 OF 1
DRAWING NO.		C-DS1031-12-XXXXXX			