

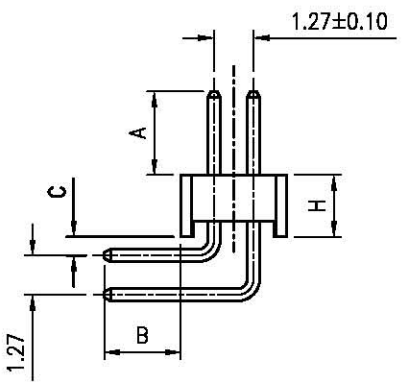
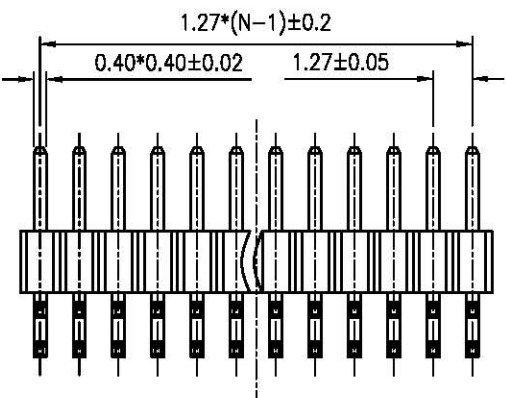


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/13/07'	~	

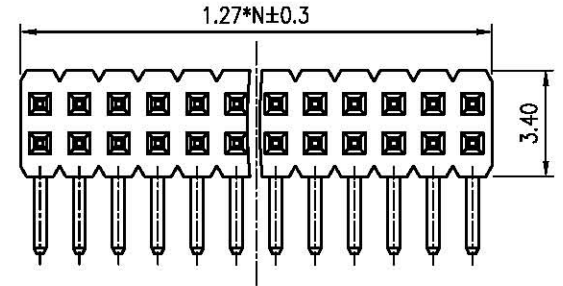


N: HALF OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL
  - INSULATOR: PA-46(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING: 1.0 Amp.
  - INSULATION RESISTANCE: 500MΩ Min.
  - DIELECTRIC WITHSTANDING: 300VAC.
  - CONTACT RESISTANCE: 50mΩ Max.
  - OPERATING TEMPERATURE: -40°C TO +105°C.
- PART NUMBER: DS1031-07
- PRODUCT NUMBER CODE:

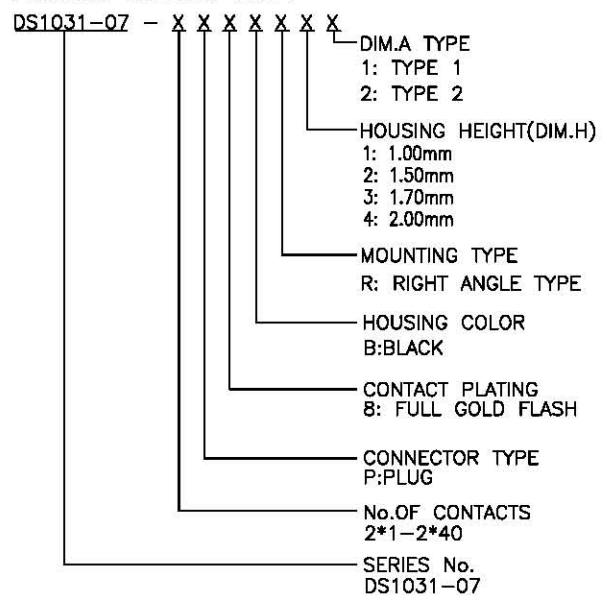

TYPE	DIM A	DIM B	DIM C
1	2.70	2.50	1.60
2	3.80	2.00	2.50
3			

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	DUAL ROW RIGHT ANGLE	
X	±0.60	X	±5'	UNITS	mm			
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1031-07 SERIES	
.XX	±0.25	.XX	±2'					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1031-07-XXXXXXX						