

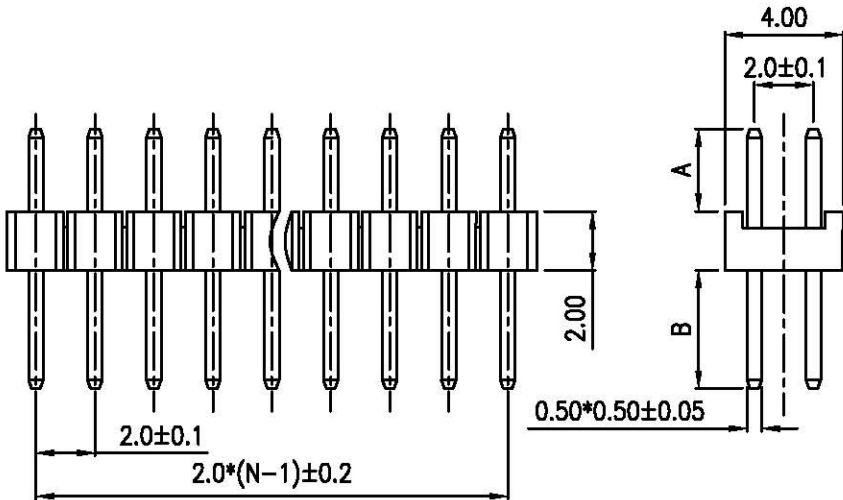


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/21/05'		
B	ADD DIM	LL 10/30/06'		
C	ADD DIM	LL 11/28/06'		

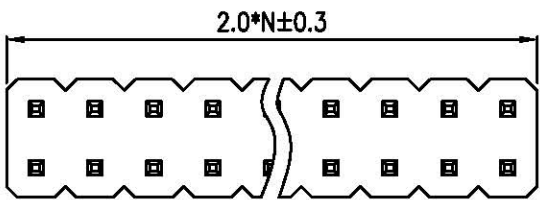

A&B: CUSTOMER LENGTH AVAILABLE  
 N: HALF OF CONTACTS

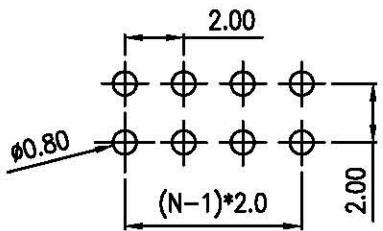

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL&FINISHES
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-20°C TO +80°C.
- PART NUMBER: DS1025-05
- PRODUCT NUMBER CODE:  
 DS1025-05 - X X X X X X

TABLE A:

TYPE	Dimension	
	A	B
1	2.80	4.00
2	3.50	5.08
3	10.00	2.00
4	2.80	10.20
5	4.00	8.00
6	2.50	4.30
7	2.80	3.90
8		

TABLE A & DIM.A B TYPE  
 1: TYPE 1  
 7: TYPE 7  
 CONTACTS TYPE  
 V:VERTICAL TYPE  
 HOUSING COLOR  
 B:BLACK  
 CONTACT PLATING  
 8: FULL GOLD FLASH  
 6: TIN  
 CONNECTOR TYPE  
 P:PLUG  
 No.OF CONTACTS  
 2\*2-2\*X  
 SERIES No.  
 DS1025-05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE
UNITS	DUAL ROW STRAIGHT
SHEET SIZE	SERIES DS1025-05 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1025-05-XXXXX		