


N: NUMBER OF CONTACTS

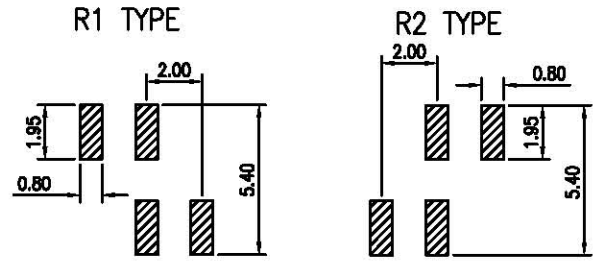

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'		

NOTES:

- MATERIAL&FINISHES
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:30mΩ Max.
  - OPERATING TEMPERATURE:-20°C TO +80°C.
- PART NUMBER: DS1025-03
- PRODUCT NUMBER CODE:

DS1025-03 - X X X X X X X

- CONTACT TYPE
- 1: R1 TYPE
- 2: R2 TYPE
- Dim. A B C TYPE
- 1: TYPE 1
- CONTACTS TYPE
- S:SMT TYPE
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8: FULL GOLD FLASH
- CONNECTOR TYPE
- P:PLUG
- No.OF CONTACTS
- 1\*2-1\*X
- SERIES No.
- DS1025-03

TABLE A:

TYPE	Dimension		
	A	B	C
1	4.00	2.50	4.40
2			
3			
4			
5			
6			
7			
8			
9			
10			

普通

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SINGLE ROW S.M.T	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1025-03 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4			
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1025-03-XXXXXXX						