



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'	~	LJC 05/17/05'
B	统一尺寸规格	LL 11/16/06'	~	LJC 11/16/06'
C	增加尺寸选项	YCH 07/27/10'		

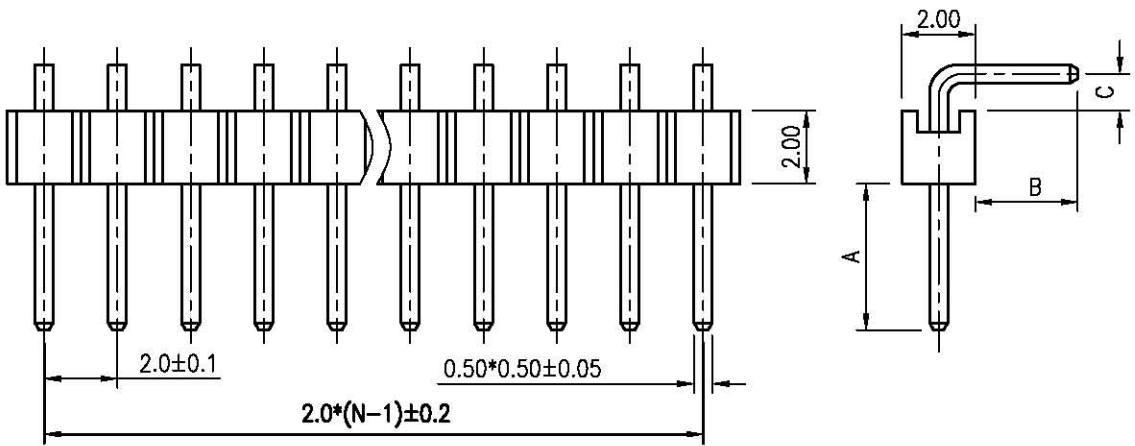

- NOTES:
- MATERIAL&FINISHES
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT MATERIAL: COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.5 Amp.
    - INSULATION RESISTANCE:1000MΩ Min.
    - DIELECTRIC WITHSTANDING:600VAC.
    - CONTACT RESISTANCE:20mΩMax.
    - OPERATING TEMPERATURE:-20°C TO +80°C.

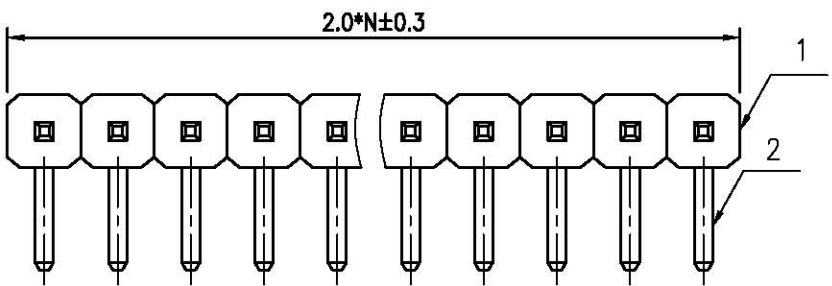


3. PRODUCT NUMBER CODE:  
 DS1025-02 - X X X X X - X

Dim. A B C type  
 1: Type 1  
 5: Type 5  
 .....  
 CONTACTS TYPE  
 R:RIGHT ANGLE TYPE  
 HOUSING COLOR  
 B:BLACK  
 CONTACT PLATING  
 8:FULL GOLD FLASH  
 CONNECTOR TYPE  
 P:PLUG  
 No.OF CONTACTS  
 1\*2-1\*X

TABLE A:

TYPE	Dimension			Pin Length
	A	B	C	
1	4.00	2.80	1.00	10.50
2	5.00	2.50	1.00	11.00
3	5.00	4.75	0.75	13.10
4	3.80	3.80	0.75	11.00
5	2.50	2.80	1.30	9.20
6	3.70	3.00	1.75	11.00
7				

N: NUMBER OF CONTACTS  
 A&B&C: CUSTOMER LENGTH AVAILABLE

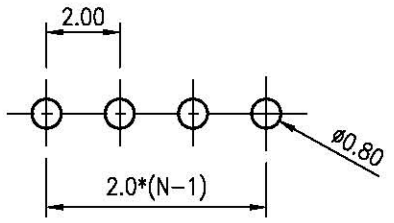

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5'		SINGLE ROW RIGHT ANGLE
.X	±0.38	.X	±3'	mm	
.XX	±0.25	.XX	±2'	A4	SERIES DS1025-02 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1025-02-XXXXX-X		