


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/15/08'	~	

N=NUMBER OF CONTACT

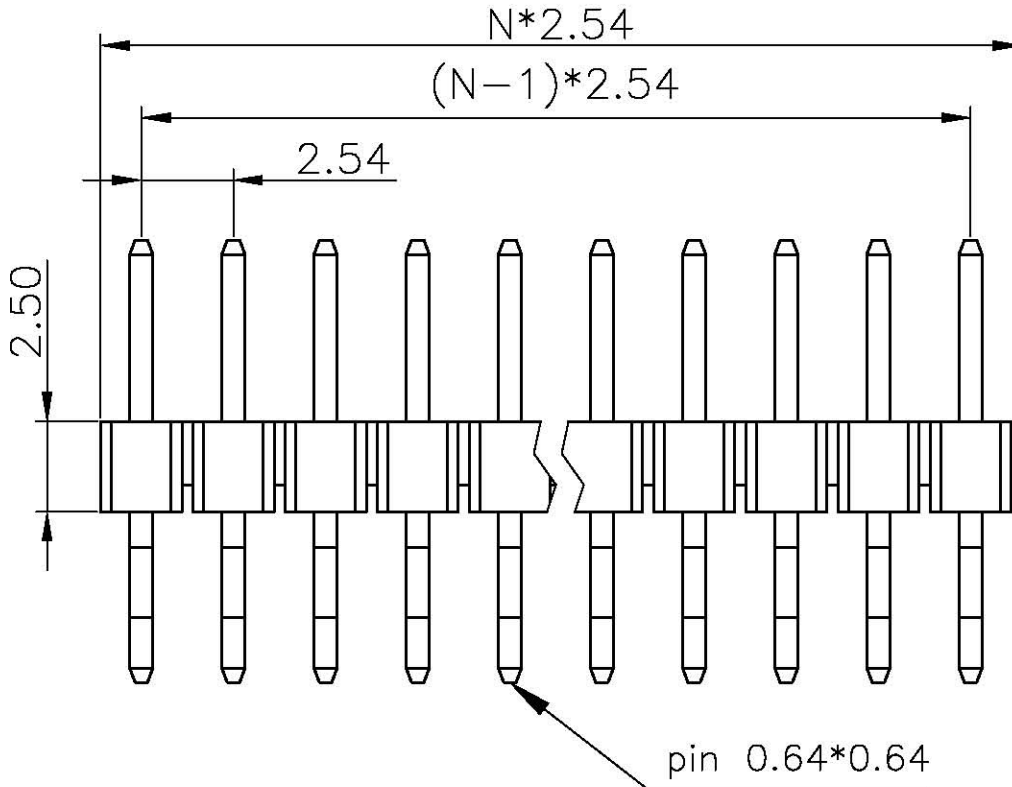

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 A.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - TEMPERATURE RANGE:-45°C TO +110°C.
- PRODUCT NUMBER CODE:
DS1022-07 - X X X X


Dim A type

- | | |
|----------------|-----------|
| 1: <u>3.20</u> | 11: _____ |
| 2: <u>6.00</u> | 12: _____ |
| 3: _____ | 13: _____ |
| 4: _____ | 14: _____ |
| 5: _____ | 15: _____ |
| 6: _____ | 16: _____ |
| 7: _____ | 17: _____ |
| 8: _____ | 18: _____ |
| 9: _____ | 19: _____ |
| 10: _____ | 20: _____ |

CONTACTS TYPE
8: Full gold flash
6: Full Tin

MOUNTING TYPE
S:SMT TYPE

No.OF CONTACTS
1*2-1*40

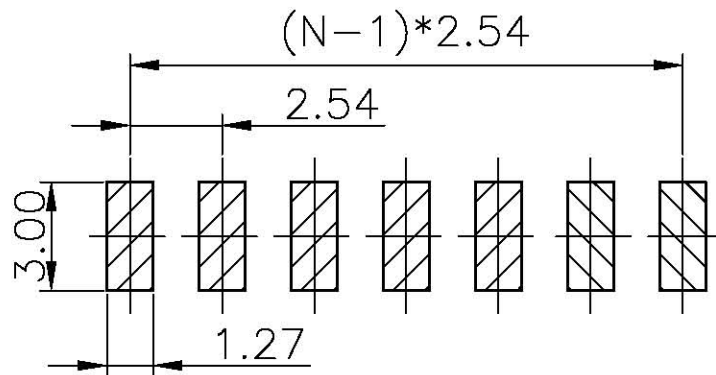

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 2.54mm
X.	±0.60	X.	±5'	UNITS	mm	SINGLE ROW SMT TYPE W/O POST	
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1022-07 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1022-07-XXXX						