

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/10/07'	~	

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 A.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - TEMPERATURE RANGE:-45°C TO +110°C.

3. PRODUCT NUMBER CODE:
DS1022-01 - X X X X


Dim A type

1:	7.10	11:	_____
2:	_____	12:	_____
3:	_____	13:	_____
4:	_____	14:	_____
5:	_____	15:	_____
6:	_____	16:	_____
7:	_____	17:	_____
8:	_____	18:	_____
9:	_____	19:	_____
10:	_____	20:	_____




CONTACT PLATING
8: Full gold flash
6: Full Tin

CONTACTS TYPE
S: SMT TYPE

No.OF CONTACTS
2*2-2*40

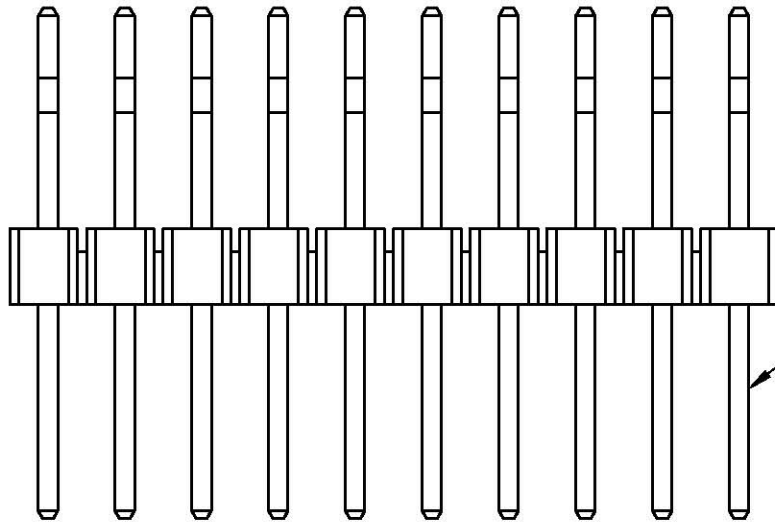

SQ PIN0.64

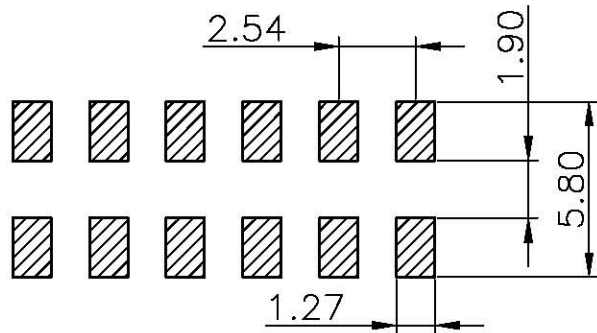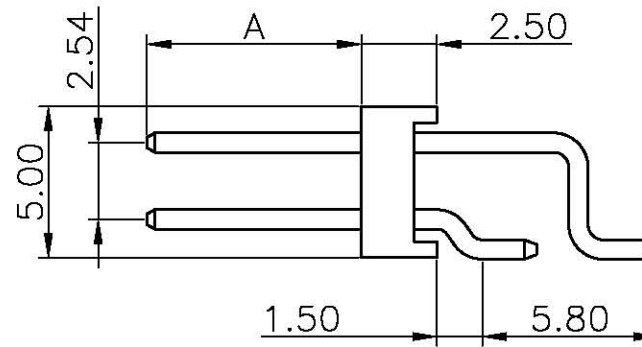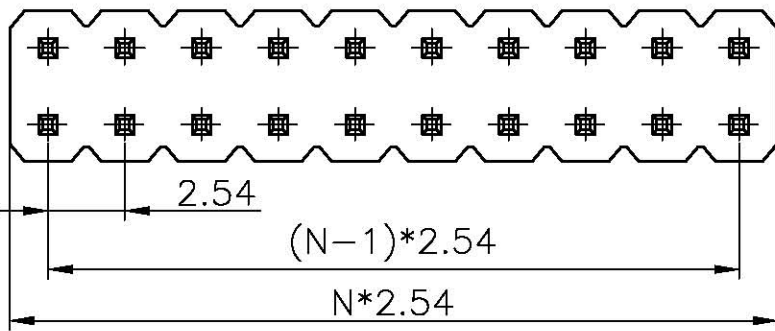

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		PIN HEADER PITCH 2.54mm
.X	±0.38	.X	±3°	mm	2 ROWS R/A SMT TYPE
.XX	±0.25	.XX	±2°	A4	SHEET SIZE
DRAWING TYPE		CUSTOMER		SERIES	DS1022-01 SERIES
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		C-DS1022-01-XXXXX			