

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1.0A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 20mΩ Max
- . Operating Temperature: -45°C to +110°C






2. MATERIALS:

- . Housing: High temperature, Nylon-46
- . Contact: Copper alloy

3. PRODUCT NUMBER CODE:

DS1065-11 - X X X X X

- PACKING TYPE  
T: TRAY  
R: TAPE ON REEL  
B: TUBE
- PICK UP SUPPORT  
S: W/ PICK UP  
X: W/O PICK UP
- HOUSING COLOR  
B: BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH  
6: FULL TIN
- No. OF CONTACTS  
2\*2-2\*40

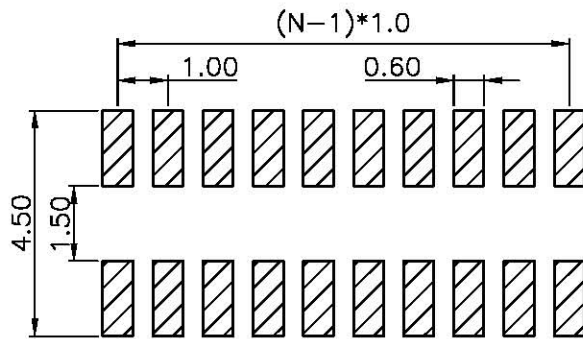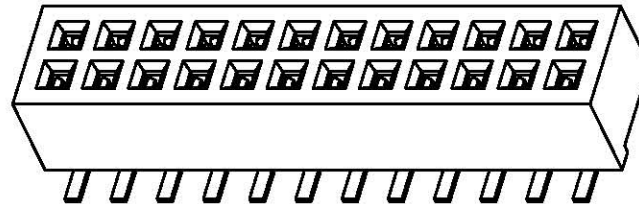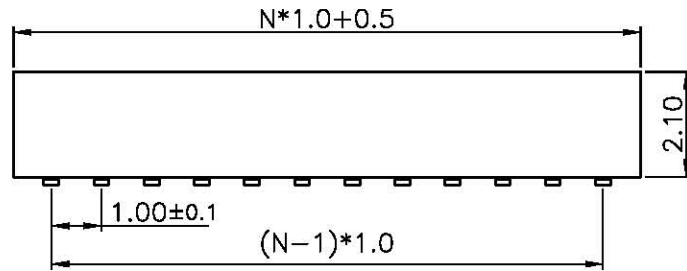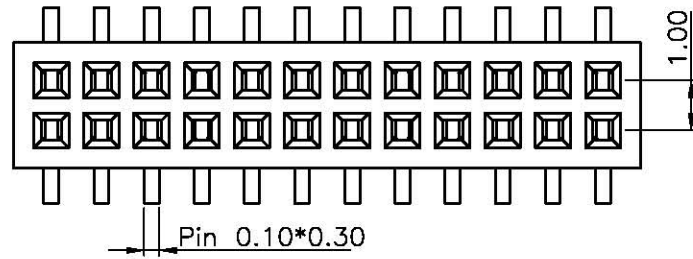

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	1.0mm FEMALE HEADER SMT TYPE W/O POST
.X	±0.38	.X	±3°		
.XX	±0.25	.XX	±2°		
DRAWING TYPE				CUSTOMER	
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		C-DS1065-11-XXXXX			
				UNITS	SHEET SIZE
				A4	SERIES DS1065-11