

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 26/06/05		

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -20°C to +70°C

2. MATERIALS



- . Contact Material: Copper alloy
- . Insulator: PBT(UL94V-0)

3. PART NUMBER: DS1065-07


4. PRODUCT NUMBER CODE:

DS1065-07 - X X X X X

- X MOUNTING TYPE
- V: VERTICAL TYPE
- HOUSING COLOR
- B: BLACK
- CONTACT PLATING
- B: FULL GOLD FLASH
- CONNECTOR TYPE
- S: SOCKET
- No. OF CONTACTS
- 1\*1-1\*40

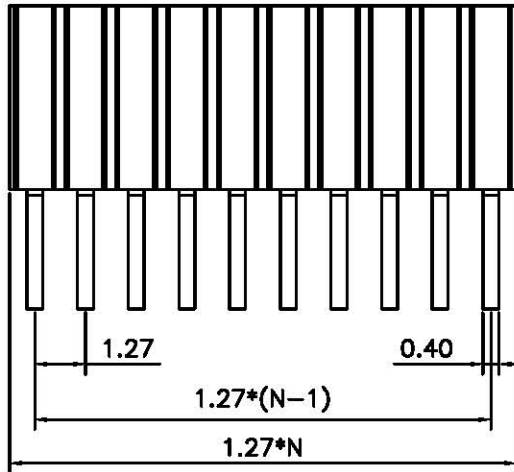

N=No. of Contacts

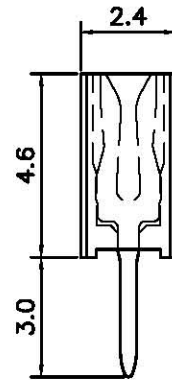

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE
X.	±0.60	X.	±5°	UNITS	mm	SINGLE ROW STRAIGHT	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-07
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET		1 OF 1		
DRAWING NO.		C-DS1065-07-XXXXX					