

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 26/06/05		

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -20°C to +70°C

2. MATERIALS


- . Contact Material: Copper alloy
- . Insulator: PBT(UL94V-0)

3. PART NUMBER: DS1065-06




4. PRODUCT NUMBER CODE:

DS1065-06 - X X X X X

- MOUNTING TYPE  
S: SMT TYPE
- HOUSING COLOR  
B: BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH
- CONNECTOR TYPE  
S: SOCKET
- No. OF CONTACTS  
2\*1-2\*40

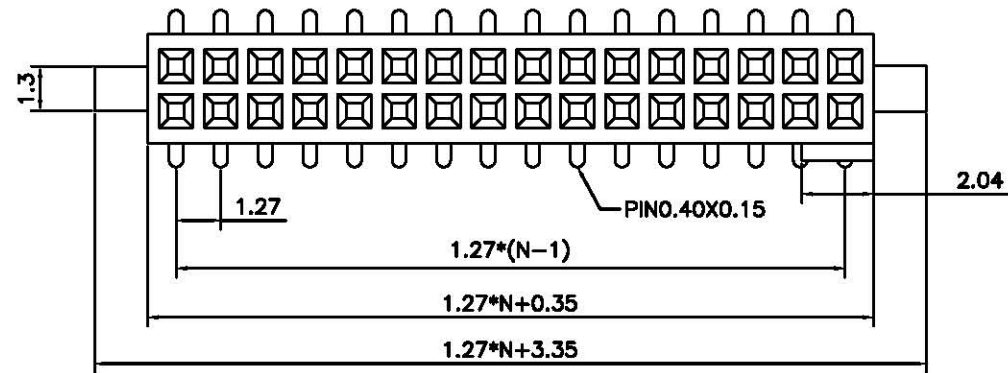

N: No. of contacts/2

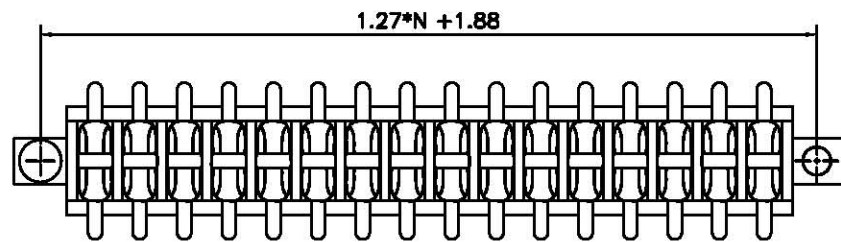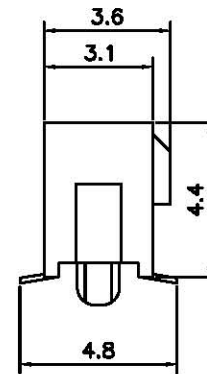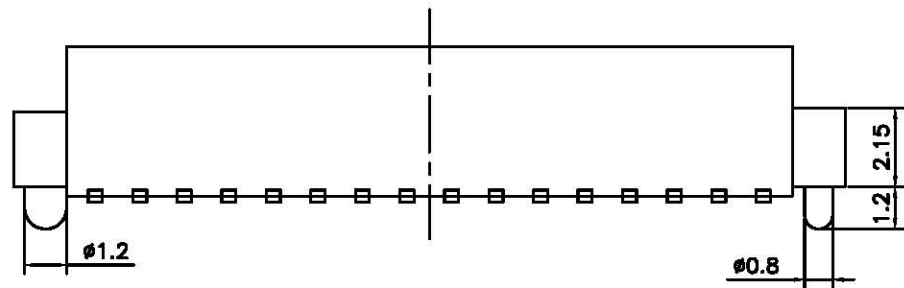

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		FEMALE HEADER PITCH 1.27mm TYPE
.X	±0.38	.X	±3°	mm	WITH POLARIZATION AND LOCAL PEG S.M.T
.XX	±0.25	.XX	±2°	A4	SERIES DS1065-06
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1065-06-XXXXX				