

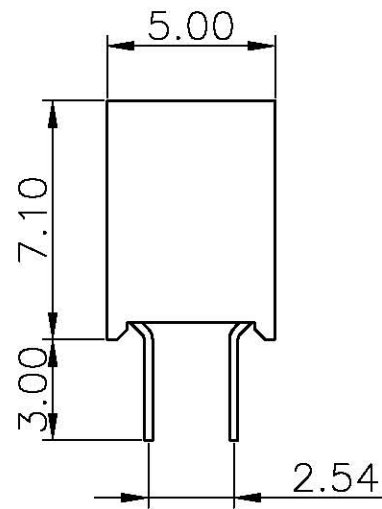
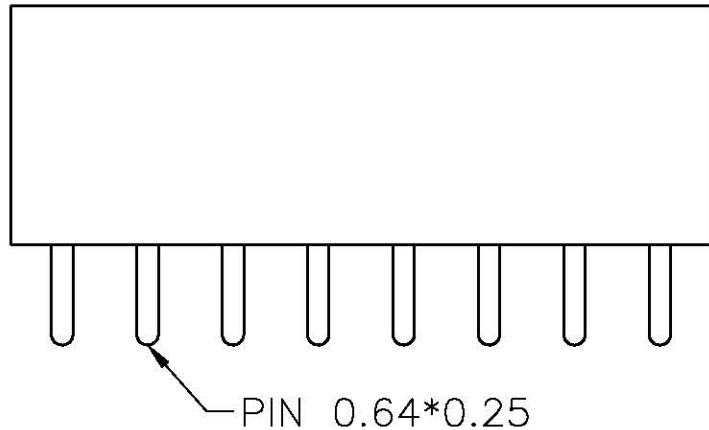


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | YCH 09/14/09' | | |
| | | | | |
| | | | | |

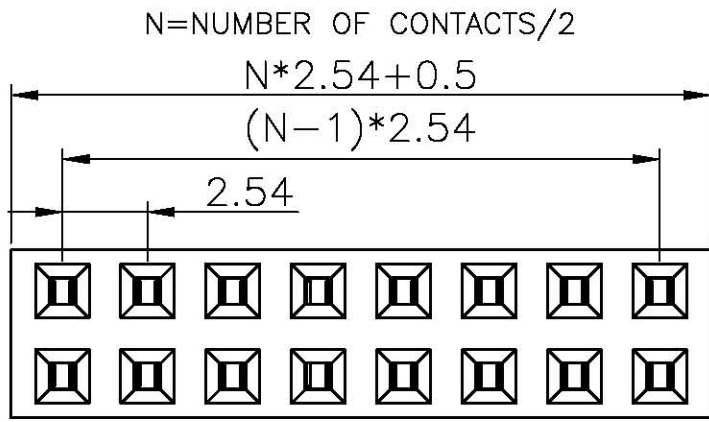

- NOTES:
- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
 - SPECIFICATION
 - TEMPERATURE: -45°C~+110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:3A.
 - PART NUMBER: DS1023-09
 - PRODUCT NUMBER CODE:
 DS1023-09 - X X X

CONTACT PLATING
 8: Full gold flash
 0: Selective gold flash
 MOUNTING TYPE
 V: V/T type
 No.of Contacts
 2*1 - 2*40

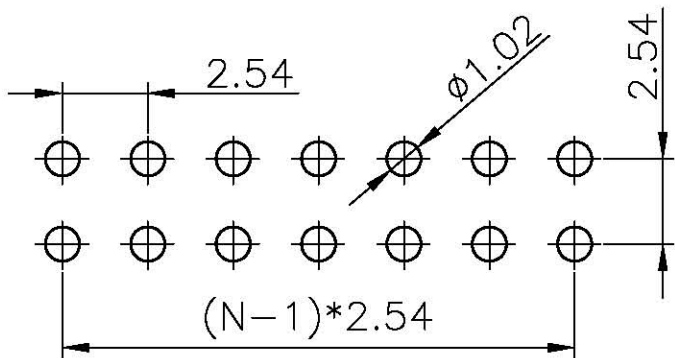

RECOMMEND PCB LAYOUT
 (TOLERANCE=±0.05)

| | | | | | | | |
|-------------------|-------|------------------|-------|------------|----|-------------------------|---------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | FEMALE HEADER PITCH |
| X. | ±0.60 | X. | ±5° | UNITS | mm | 2.54mm V/T TYPE H=7.1mm | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1023-09 SERIES |
| .XX | ±0.25 | .XX | ±2° | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | |
| SCALE | | 1:1 | SHEET | 1 OF 1 | | | |
| DRAWING NO. | | C-DS1023-09-XXXX | | | | | |