
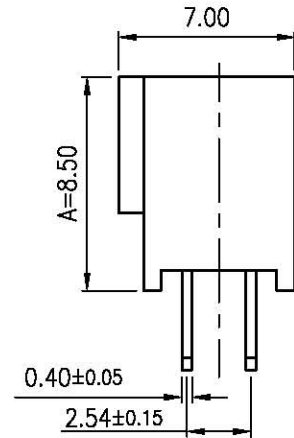
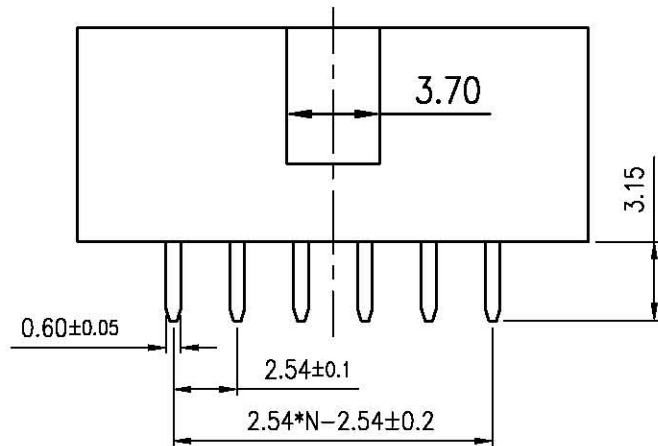


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/28/08'	~	

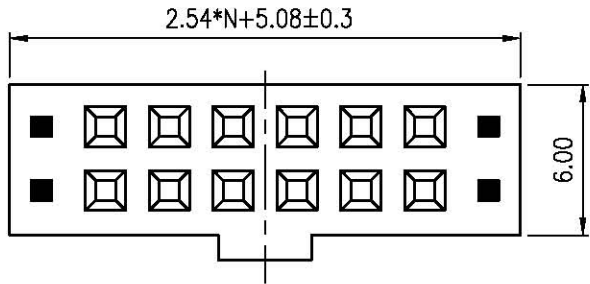

NOTES:


- SPECIFICATION
  - TEMPERATURE: -20° to +80°C.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AC.
  - INSULATION RESISTANCE: 1000MΩ
  - CURRENT RATING: 3Amps.
  - CONTACT RESISTANCE: 30mΩ.max.

2. PART NUMBER: DS1023-02

3. PRODUCT NUMBER CODE:

DS1023-02 - X X X X

- PROFILE HEIGHT(DIM A)  
1: 8.5mm
- CONTACT PLATING  
0: SELECTIVE GOLD FLASH  
F1: FULL GOLD FLASH
- MOUNTING TYPE  
S: Straight TYPE  
R: R/A TYPE
- No.OF CONTACTS  
2\*2~2\*40(2 rows)

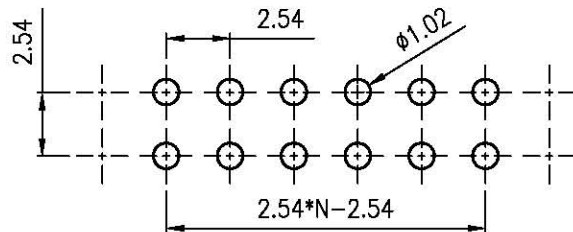

RECOMMAND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm FEMALE HEADER FOR "BOX HEADER" MATING	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1023-02 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1023-02-XXXX						