



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
 - CONTACT RETENTION FORCE: 500gf Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C ~ +105°C.
- PRODUCT NUMBER CODE:

DS1023- X X X X

- PROFILE HEIGHT(DIM A)
1: 8.5mm
- CONTACT PLATING
0: SELECTIVE GOLD FLASH
F1: FULL GOLD FLASH
2: NICKEL + GOLD FLASH
- MOUNTING TYPE
S: Straight TYPE
- No.OF CONTACTS
1*1-1*40
2*2-2*40
3*3-3*40

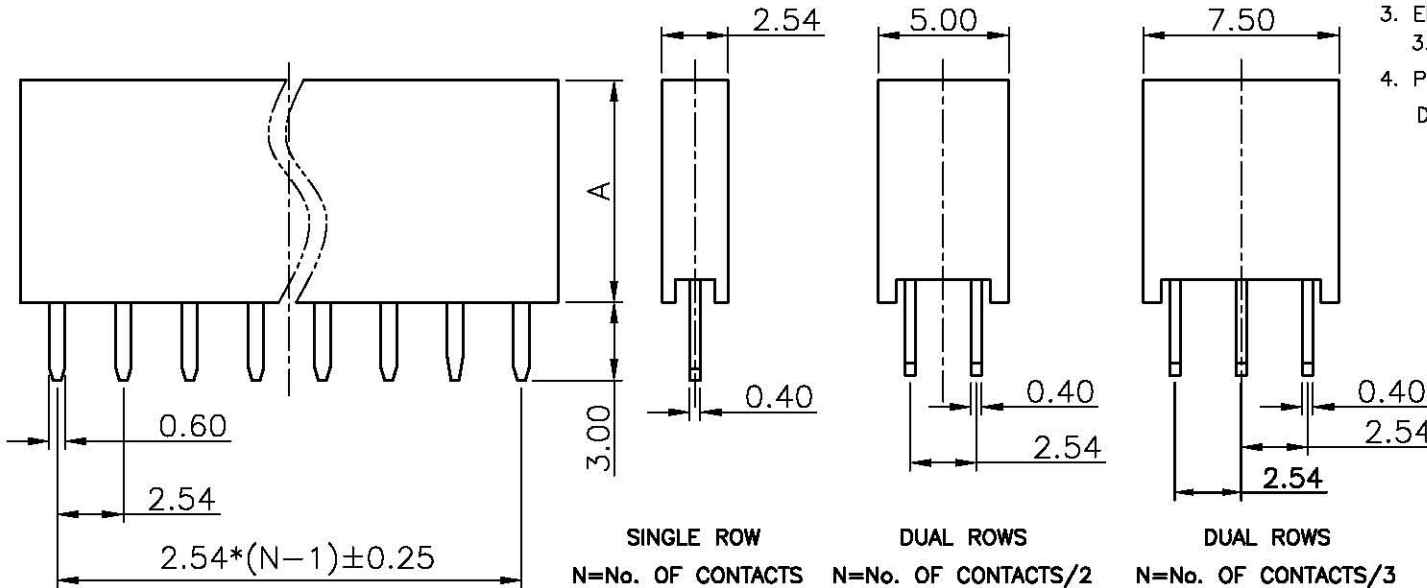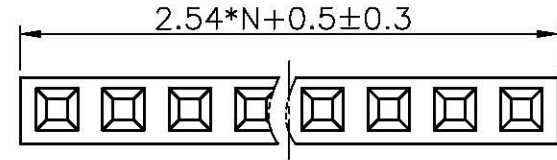

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALT HEADER PITCH
X.	±0.60	X.	±5°	UNITS	mm	2.54mm V/T SINGLE/DUAL ROWS TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1023 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1023-XXX1-A						