

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:  
DS1002-01 - X X X X

Clip plating

- Tin 150u"
- Tin 200u"
- G/F
- Gold 3u"
- Gold 10u"
- Gold 15u"

Pin plating


- Tin 150u"
- Tin 200u"
- G/F
- Gold 3u"
- Gold 10u"
- Gold 15u"

Mounting type


- V: V/T TYPE
- R: R/A TYPE
- S: SMT TYPE

No. of contacts


- 1\*1 - 1\*64
- 2\*1 - 2\*40

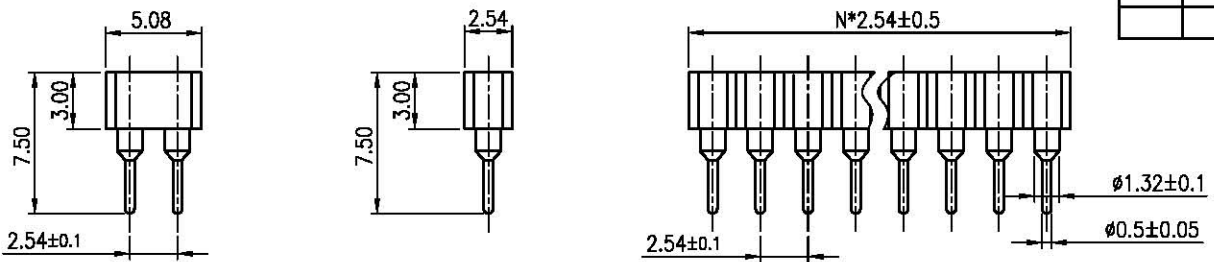

Dual rows  
Single row  
V/T TYPE

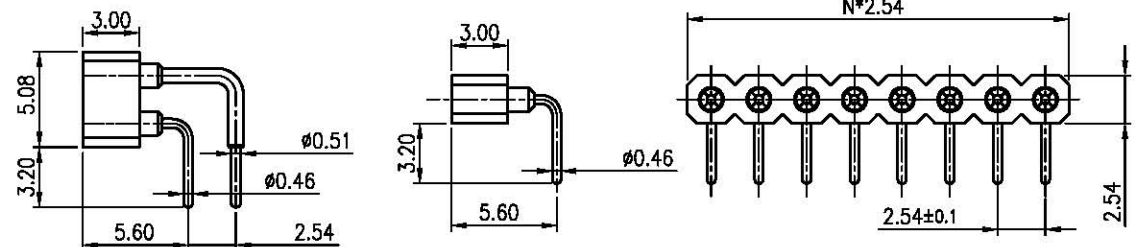

Dual rows  
Single row  
R/A TYPE

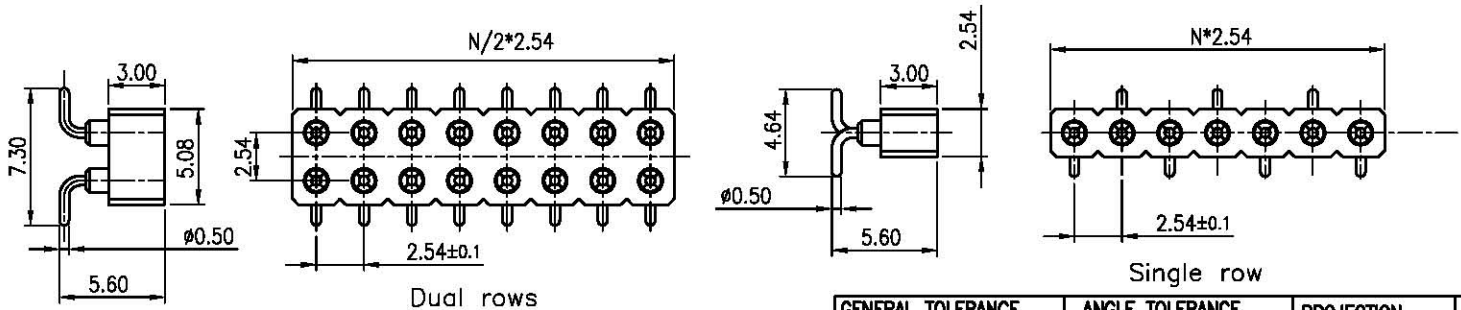

Dual rows  
Single row  
SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1002-01-XXXX		

PROJECTION	TITLE	IC SOCKET R/A & V/T & SMT	
UNITS	mm	PITCH 2.54mm	
SHEET SIZE	A4	SERIES	DS1002-01 SERIES

广东中南电子电器有限公司  
http://zn-cn.com