



STANDARD LATCH SPECIAL LATCH

FIGURE A

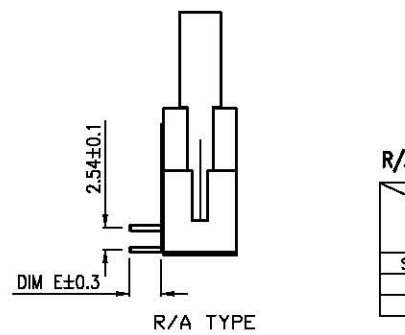

R/A TYPE	
Latch Type	DIM. E
Standard Latch	3.70

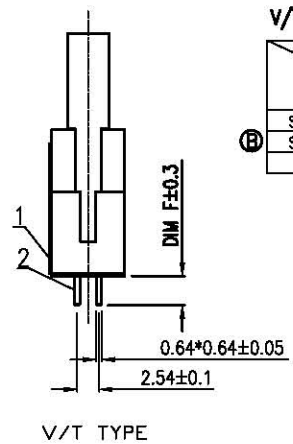

V/T TYPE	
Latch Type	DIM. F
Standard Latch	3.10
Standard Latch	8.10

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 04/27/05'	~	卢金春
B	ADD DIM	LL 09/21/06'	~	卢金春
C	胶芯加胶	YCH 04/09/08'	~	卢金春
D	整理图面	YCH 05/24/08'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1011
- PRODUCT NUMBER CODE: DS1011- X X X X X X

LOCK DIM.
7: 7.90mm(standard) 4: 4.50mm(special)

HOUSING COLOR
B: BLACK

CONTACT PLATING
Si: Full Gold flash

HOUSING TYPE
B: BIG LATCH HOUSING

MOUNTING TYPE
S: STRAIGHT
R: R/A

No.OF CONTACTS
10 14 16 20
26 30 34 40
50 60 64

SERIES No.
DS1011 SERIES

AVAILABLE DIMENSION TABLE

No.of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.1	37.18	39.72	44.80	52.42	57.50	62.58	70.20	82.90	95.60	100.68
B	22.20	27.28	29.82	34.90	42.52	47.60	52.68	60.30	73.00	85.70	90.78
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.10	23.18	25.72	30.47	38.42	43.50	48.58	56.20	68.90	81.60	86.68

BIG LATCH HOUSING

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	CUSTOMER
2	CONTACT		COPPER ALLOY	GOLD PLATED		
1	HOUSING		THERMOPLASTIC	UL 94 V-0		
					SCALE	1:1 SHEET 1 OF 1
					DRAWING NO.	C-DS1011-XXBXXX-D

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	SHOUDED HEADER PITCH 2.54mm	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1011 SERIES

广东中南电子电器有限公司

www.zn-cn.com