


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

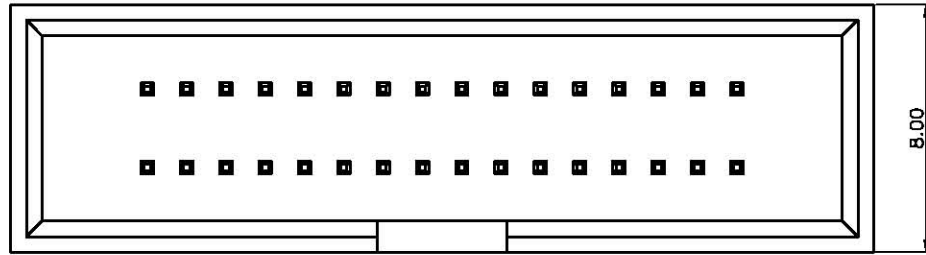

NOTES:




- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-45°C TO+110°C.

3. PART NUMBER: DS1031-16

4. PRODUCT NUMBER CODE:

DS1031-16 - X X X X

- X: HOUSING COLOR
B: BLACK
- X: CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- X: MOUNTING TYPE
V: STRAIGHT TYPE
- X: No.OF CONTACTS
06 ~ 40

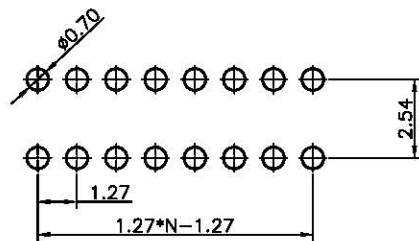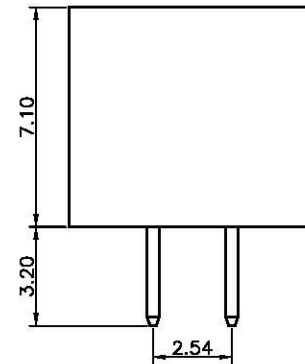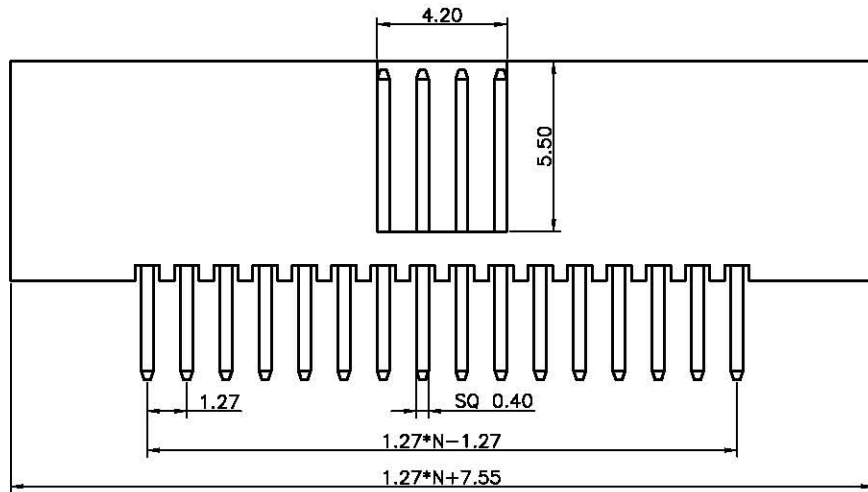

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-16-XXXX		

PROJECTION	TITLE
UNITS	1.27*2.54mm BOX HEADER PITCH
SHEET SIZE	A4
SERIES	DS1031-16 SERIES

广东中南电子电器有限公司

zn-cn.com