

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

NOTES:







- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - STORAGE TEMPERATURE:-20-70°C.
  - OPERATING TEMPERATURE:0-85°C.
  - CONTACT RESISTANCE:20mΩ max.(initial).
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PART NUMBER: DS1014

4. PRODUCT NUMBER CODE:

DS1014- X X X X

- HOUSING COLOR
  - B: BLACK
  - W: WHITE
  - L: BLUE
  - A: GRAY
- CONTACT PLATING
  - F1: FULL GOLD FLASH
- MOUNTING TYPE
  - S: V/T TYPE
  - R: R/A TYPE
  - E: Elevator TYPE
- No.OF CONTACTS
  - 08 10 12 14 16 20 26
  - 30 34 40 50 60 64
- SERIES No. DS1014

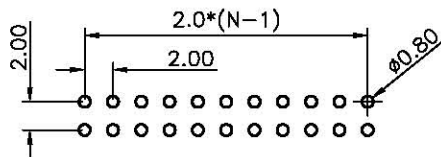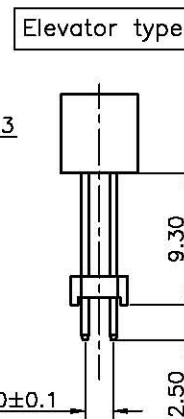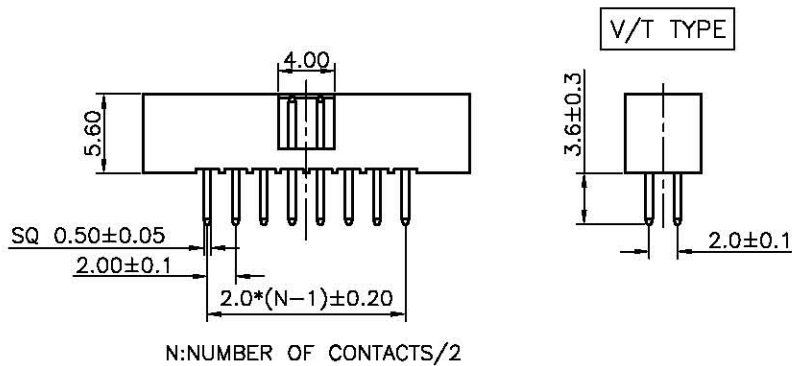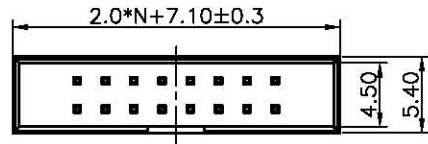

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	BOX HEADER PITCH 2.00mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1014 SERIES	
.XX	±0.25	.XX	±2°	广东中南电子电器有限公司 zn-cn.com				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1014-XXXX						